


REV	DATE	DESCRIPTION	DRAWN

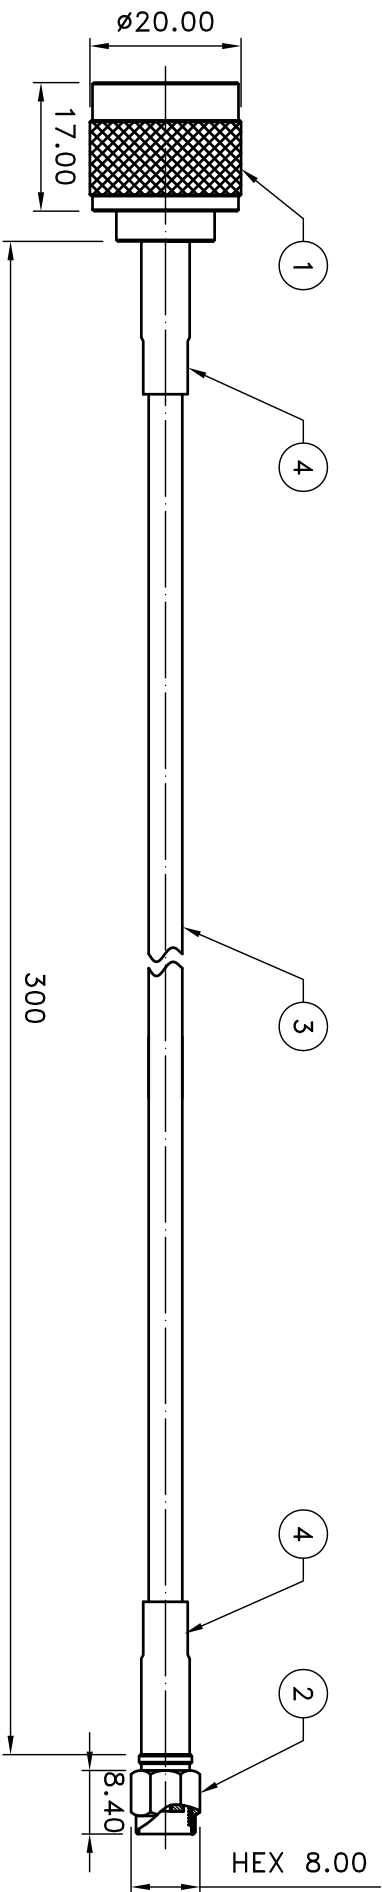


NOTE:
 1.1N MALE
 CENTER PIN GOLD PLATING 3μ THICK OVER NICKEL PLATING 70μ THICK OVER
 NICKEL STRIKE
 BODY NICKEL PLATING 70μ THICK OVER NICKEL STRIKE
 BRASS PER QQ-B-626
 TEFLON MIL-P-19468
 FINISH PLATING THICKNESS IN MICRO-INCHES
 COPPER PARTS AUTOMATIC CNC MANUFACTURING
 ROHS COMPLIANT

2.RP SMA MALE
 CENTER PIN GOLD PLATING 30μ THICK OVER NICKEL PLATING 70μ THICK OVER
 NICKEL STRIKE
 BODY GOLD 5μ THICK OVER NICKEL PLATING 70μ THICK OVER NICKEL STRIKE
 BRASS PER QQ-B-626
 TEFLON MIL-P-19468
 BERYLLIUM COPPER PER QQ-C-530
 FINISH PLATING THICKNESS IN MICRO-INCHES
 COPPER PARTS AUTOMATIC CNC MANUFACTURING
 ROHS COMPLIANT

3.LOW LOSS 200A COAXIAL CABLE/3D
 ATTENUATION : 0.32dB/m@900MHZ 0.42dB/m@1800MHZ 0.61dB/m@3000MHZ
 CONDUCTOR : BARE COPPER WIRE/Ø1.12mm
 INSULATION : GAS-FPE/Ø2.95mm
 TAPE : BONDED ALUMINUM FOIL
 SHIELD : TINNED COPPER WARE/16*4*0.10mm/59% COVERAGE
 JACKET : ROHS PVC/Ø4.95mm
 ROHS COMPLIANT

NO	DESCRIPTION	MATERIAL	FINISH	Q'ty
4	D0176 (SHRINK TUBE)	PE	BLACK	2
3	LLC200A	ASSY	BLACK	1
2	SMA-1001-10-F2-RP-TGG	BRASS	GOLD	1
1	N-1101-6-F2-TGN	BRASS	NICKEL	1

NOTE	DIMENSION
1.STRIP ALL BURRS. 2.ALL DIMENSIONS ARE AFTER PLATING. 3.DIAMETERS ON COMMON CENTERS. TO BE CONCENTRIC WITHIN 0.1 T.I.R 4.CHAMFER 1ST & LAST BREAK ALL CORNERS & EDGES CO.15 MAX.	UNLESS OTHERWISE NOTED TOLERANCES 0.XX=±0.2 CABLE LENGTH: L≥10000=+50 1000≤L<10000=-30 L<1000=-8

 華耀科技有限公司 Hua Yao Technologies co.,Ltd.	
TITLE	N1101-SMA1001
DRAWING NO.	11016A200100110R-1300
APPROVED	
DRAWN	ALICE
CHECKED	
DRAWN DATE	11/08/12
SCALE	1:1
UNIT	mm